



**FULL TECH**  
Full Tech Stainless Steel Engineering Co.

**富達廚具**



**富達廚具工程公司**

**Full Tech Stainless Steel Eng. Co.**

地址: 九龍油麻地上海街306 - 308 號地下

G/F Stanghai St. 306 - 308, KLN

電話: 2332 8960

傳真: 2336 6986

電郵: [info@fulltechse.com.hk](mailto:info@fulltechse.com.hk)

網址: [www.fulltechse.com.hk](http://www.fulltechse.com.hk)

**商用雪櫃系列**

**Full Tech**  
Full Tech Stainless Steel Engineering Co.

富達廚具



CONTENTS

|    |   |
|----|---|
| 01 | GN 直立式雪櫃系列<br>GN Upright Commercial Refrigerator Series |
| 03 | 直立式雪櫃系列<br>Upright Commercial Refrigerator Series       |
| 05 | 宴會冷、熱櫃系列<br>Banquet Cold and Hot Cabinet Series         |
| 07 | GN款平台雪櫃系列<br>GN Undercounter Refrigerator Series        |
| 09 | 平台雪櫃系列<br>Undercounter Refrigerator Series              |
| 13 | 爐台櫃系列<br>Under Broiler Counters Series                  |
| 15 | 急速冷藏冷凍櫃系列<br>Flash Freezing Refrigerator Series         |
| 17 | 推入式雪櫃系列<br>Push Type Refrigerator Series                |
| 19 | 飲品展示櫃系列<br>Beverage Display Cabinet Series              |
| 21 | 紅酒展示櫃系列<br>Wine Display Cabinet Series                  |
| 23 | 雪糕展示櫃系列<br>Ice Cream Display Cabinet Series             |
| 25 | 蛋糕展示櫃系列<br>Cake Display Cabinet Series                  |
| 27 | 壽司展示櫃系列<br>Sushi Display Cabinet Series                 |
| 29 | 風幕展示櫃系列<br>Wind Curtain Display Cabinet Series          |


# GN 直立式雪櫃系列

## GN Upright Commercial Refrigerator Series





### PRODUCT FEATURES | 產品規格

- 鍍鋅底及背
- 304 不銹鋼外殼及內膽
- 採用 150mm 高的可調子彈腳
- 自動化水設計
- 每個櫃配有 2 對托角和 2 件 PE 層網
- 適用於 2/1 GN 盤
- 數字溫控
- 220V / 50Hz
- 內膽圓弧設計方便清潔
- Galvanized steel back and base
- 304 grade Stainless steel exterior and interior
- On 150mm legs
- Self evaporation condensation water, drainage not required
- Each cabinet is equipped with 2 pairs of bracket Angle and 2 PE layer net
- Accommodate 2/1 GN size
- Digital Controller
- 220V / 50Hz
- The liner arc design is convenient to clean

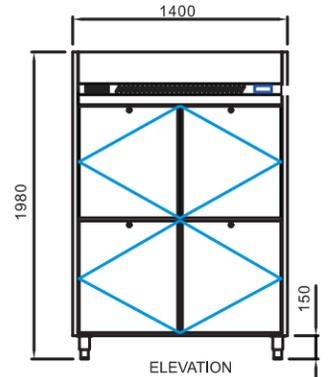

### ALTERNATIVE | 備選

- 304 不銹鋼背
- 304 不銹鋼底
- 配燈
- 發熱玻璃門
- 雙通門
- 雙邊發熱膜玻璃門 (不適用於低溫櫃)
- 下門改抽屜 (不適用於低溫櫃)
- 下門改 3 抽屜 (不適用於低溫櫃)
- 輪子
- 圓鎖
- 220V / 60Hz
- 304 stainless steel back
- 304 stainless steel bottom
- Interior light
- Heated film glass door
- Double pass through door
- Dual heating film through the glass door (Not applicable to low-temperature refrigerator)
- Bottom door can change to 2 drawers (Not applicable to low-temperature refrigerator)
- Bottom door can change to 3 drawers (Not applicable to low-temperature refrigerator)
- Castors
- Lock plate fitted for door
- 220V / 60Hz

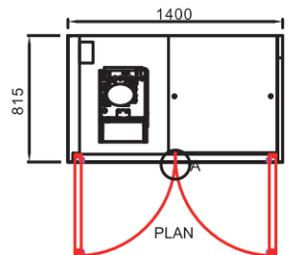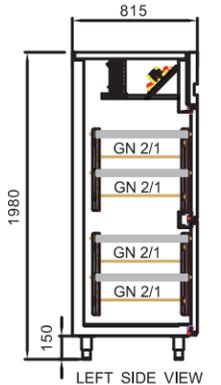


| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FHU1FD      | 737*815*1980         | 單門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 550 L            |
| FMU1FU      | 737*815*1980         | 單門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 550 L            |
| FLU1FD      | 737*815*1980         | 單門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 550 L            |
| FHU2FD      | 1400*815*1980        | 雙門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 1170L            |
| FMU2FD      | 1400*815*1980        | 雙門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 1170L            |
| FLU2FD      | 1400*815*1980        | 雙門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 1170L            |
| FHU2HD      | 737*815*1980         | 雙門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 550 L            |
| FMU2HD      | 737*815*1980         | 雙門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 550 L            |
| FLU2HD      | 737*815*1980         | 雙門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 550 L            |
| FHU4HD      | 1400*815*1980        | 四門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 1170L            |
| FMU4HD      | 1400*815*1980        | 四門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 1170L            |
| FLU4HD      | 1400*815*1980        | 四門高身中溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 1170L            |

# 直立式雪櫃系列 Upright Commercial Refrigerator Series





## PRODUCT FEATURES | 產品規格

- 鍍鋅底及背
- 304 不銹鋼外殼及內膽
- 採用 150mm 高的可調子彈腳
- 自動化水設計
- 每個櫃配有 2 對托角和 2 件 PE 層網
- 適用於 2/1 GN 盤
- 數字溫控
- 220V / 50Hz
- Galvanized steel back and base
- 304 grade Stainless steel exterior and interior
- On 150mm legs
- Self evaporation condensation water, drainage not required
- Each cabinet is equipped with 2 pairs of bracket Angle and 2 PE layer net
- Accommodate 2/1 GN size
- Digital Controller
- 220V / 50Hz
- The liner arc design is convenient to clean

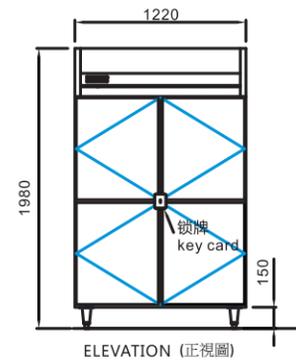

## ALTERNATIVE | 備選

- 304 不銹鋼背
- 304 不銹鋼底
- 配燈
- 發熱玻璃門
- 雙通門
- 雙邊發熱膜玻璃門 (不適用於低溫櫃)
- 下門改抽屜 (不適用於低溫櫃)
- 下門改 3 抽屜 (不適用於低溫櫃)
- 輪子
- 圓鎖
- 220V / 60Hz
- 304 stainless steel back
- 304 stainless steel bottom
- Interior light
- Heated film glass door
- Double pass through door
- Dual heating film through the glass door (Not applicable to low-temperature refrigerator)
- Bottom door can change to 2 drawers (Not applicable to low-temperature refrigerator)
- Bottom door can change to 3 drawers (Not applicable to low-temperature refrigerator)
- Castors
- Lock plate fitted for door
- 220V / 60Hz

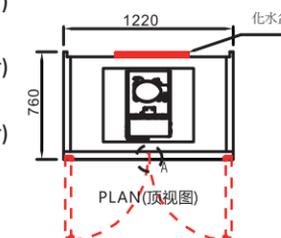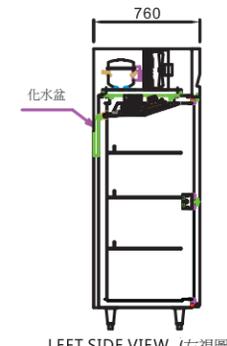

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FH0.45U1DF  | 630*760*1980         | 單門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 412L             |
| FM0.45U1DF  | 630*760*1980         | 單門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 412L             |
| FL0.45U1DF  | 630*760*1980         | 單門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 412L             |
| FH0.45U2DF  | 630*760*1980         | 雙門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 412L             |
| FM0.45U2DF  | 630*760*1980         | 雙門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 412L             |
| FL0.45U2DF  | 630*760*1980         | 雙門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 412L             |
| FH1.0U2DF   | 1220*760*1980        | 雙門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 880L             |
| FM1.0U2DF   | 1220*760*1980        | 雙門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 880L             |
| FL1.0U2DF   | 1220*760*1980        | 雙門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 880L             |
| FH1.0U4DF   | 1220*760*1980        | 四門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 880L             |
| FM1.0U4DF   | 1220*760*1980        | 四門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 880L             |
| FL1.0U4DF   | 1220*760*1980        | 四門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 880L             |
| FH1.5U3DF   | 1830*760*1980        | 三門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 1300L            |
| FM1.5U3DF   | 1830*760*1980        | 三門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 1300L            |
| FL1.5U3DF   | 1830*760*1980        | 三門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 1300L            |
| FH1.5U6DF   | 1830*760*1980        | 六門高身高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 1300L            |
| FM1.5U6DF   | 1830*760*1980        | 六門高身中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 1300L            |
| FL1.5U6DF   | 1830*760*1980        | 六門高身低溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 1300L            |

# 宴會冷、熱櫃系列 Banquet Cold and Hot Cabinet Series



## PRODUCT FEATURES | 產品規格


- 304不銹鋼底座及背板
- 304不銹鋼外殼及內膽
- 專門存放21吋GN盤，2排12層供冷熱選擇
- 容納21個GN盤
- 數碼溫控器
- Ø125mm重型萬向剎車腳輪
- 內膽圓角設計方便清潔
- 304-grade stainless steel back and base
- 304-grade stainless steel exterior and interior
- Designed to hold 21" GN pans, 12 pairs of tray slides per double section
- Accommodates 21 GN size pans
- Digital controller
- Ø125mm heavy-duty swivel and brake casters
- The interior design features rounded corners for easy cleaning

## ALTERNATIVE | 備選

- 220V/60Hz
- 220V/50Hz


## REFRIGERATOR SERIES

### 冷櫃系列

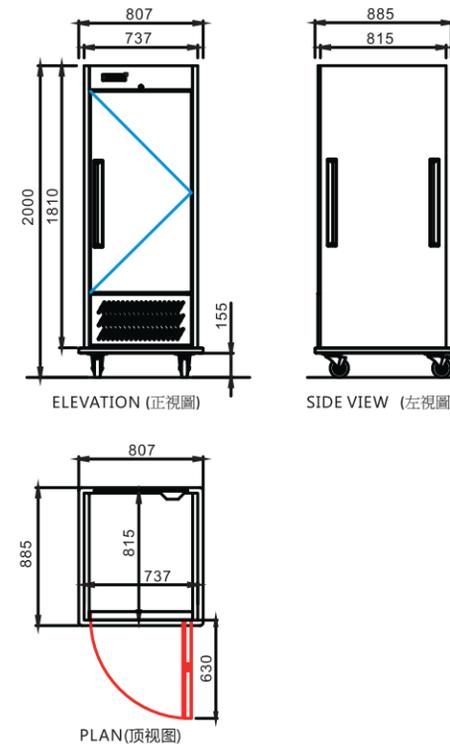

## HOT CABINET SERIES

### 熱櫃系列

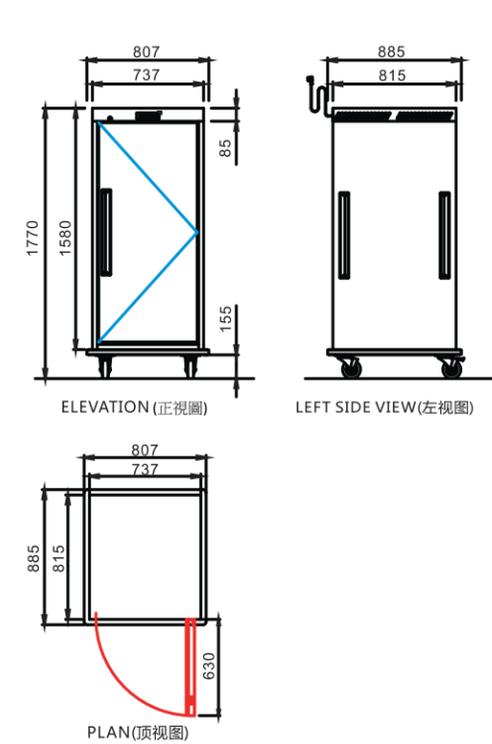

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FMDR1D      | 807*885*2000         | 單門宴會冷櫃      | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 495L             |
| FMDR2D      | 1470*885*2000        | 雙門宴會冷櫃      | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 1055L            |
| FMDH1D      | 807*885*1770         | 單門宴會熱櫃      | —             | +78~+82°C             | 220V/50HZ     | —          | 525L             |
| FMDH2D      | 1470*885*1770        | 雙門宴會熱櫃      | —             | +78~+82°C             | 220V/50HZ     | —          | 1180L            |

# GN款平台雪櫃系列 GN Undercounter Refrigerator Series



## PRODUCT FEATURES | 產品規格

- 304不銹鋼外殼及內膽
- 鍍鋅鋼底板及背板
- 架腳150mm高的可調節支腳
- 每小門配2對滑軌和2件PE包覆隔板 (限層板款)
- 適用1/1 GN盤
- 數碼溫控設計
- 自動蒸發冷凝水設計，無需排水
- 220V/50Hz
- 插拔式冷凝機組，便於清潔及維修
- 內膽圓邊設計方便清潔
- 304-grade stainless steel exterior and interior
- Galvanized steel back and base
- 150mm(H) adjustable legs
- Each compartment fitted with 2 pairs of tray slides and 2 pieces PE coated wire shelf (for drawer model only)
- Accommodates 1/1 GN size
- Digital controller
- Self-evaporating condensation water, drainage not required
- 220V/50Hz
- Removable cassette-type condensing unit and evaporator for easy cleaning and repairs
- The liner design is convenient to clean

## ALTERNATIVE | 備選

- 304不銹鋼底板 / 背板
- 冷藏室配熒光燈
- 冷凍室配LED燈
- 發熱玻璃門
- 雙面通櫃設計
- 每節2抽屜 / 3抽屜
- 每節2/3+1/3抽屜
- 背板擋水沿
- 50(H)mm裙腳配百葉風口
- 不銹鋼裙腳
- 沙律盆口
- 右側壓縮機
- 遙控冷凝系統
- 腳輪
- 220V/60Hz
- 304 stainless steel bottom/ back
- Fluorescent lamp for chillers
- LED light for freezer
- Heated film glass door
- Pass-through door
- 2 drawers / 3 drawers per section
- 2/3+1/3 drawers per section
- Backsplash
- 50(H)mm skirting with louvre for sitting on plinth
- Stainless steel skirting
- Saladette opening
- Right-hand side compressor
- Remote refrigeration system
- Castors
- 220V/60Hz



# 平台雪櫃系列 Undercounter Refrigerator Series




## PRODUCT FEATURES | 產品規格

- 304不銹鋼外殼及內膽
- 鍍鋅鋼底板及背板
- 架腳150mm高的可調節支腳
- 每個小門配1件PE包覆層板 (限層板款)
- 數碼溫控設計
- 自動蒸發冷凝水設計，無需排水
- 220V/50Hz
- 插拔式冷凝機組，便於清潔及維修
- 內膽圓邊設計方便清潔
- 304-grade stainless steel exterior and interior
- Galvanized steel back and base
- 150mm(H) adjustable legs
- One PE tray per cabinet/door (for shelf model only)
- Digital controller
- Self-evaporating condensation water, drainage not required
- 220V/50Hz
- Removable cassette-type condensing unit and evaporator for easy cleaning and repairs
- The liner air design is convenient to clean

## ALTERNATIVE | 備選


- 304不銹鋼底板
- 304不銹鋼背板
- 冷藏室配熒光燈
- 冷凍室配LED燈
- 發熱玻璃門
- 雙面通櫃設計
- 每節2抽屜
- 每節3抽屜
- 每節2/3+1/3抽屜
- 背板擋水沿
- 50(H)mm裙腳配百葉風口
- 不銹鋼裙腳
- 沙律盆口
- 右側壓縮機
- 遙控冷凝系統
- 私隱式門鎖
- 腳輪
- 220V/60Hz
- 304 stainless steel bottom
- 304 stainless steel back
- Fluorescent lamp for chillers
- LED light for freezer
- Heated film glass door
- Pass-through door
- 2 drawers per section
- 3 drawers per section
- 2/3 + 1/3 drawers per section
- Backsplash
- 50(H)mm skirting with louvre for sitting on plinth
- Stainless steel skirting
- Saladette opening
- Right-hand side compressor
- Remote refrigeration system
- Proprietary cam lock
- Castors
- 220V/60Hz

## 1/1 GN款平台雪櫃系列 | 1/1 GN Undercounter Refrigerator Series

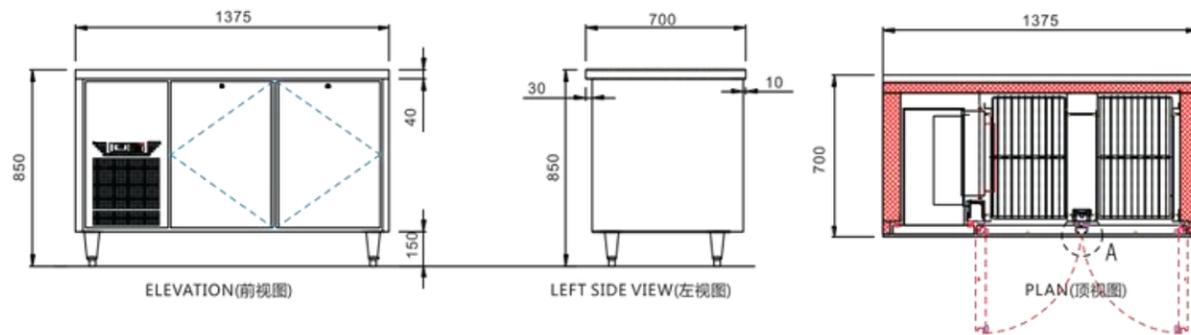


| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title   | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|---------------|---------------|-----------------------|---------------|------------|------------------|
| FHC1G1D     | 910*700*850          | 1/1GN單門平台高溫雪櫃 | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 128L             |
| FMC1G1D     | 910*700*850          | 1/1GN單門平台中溫雪櫃 | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 128L             |
| FLC1G1D     | 910*700*850          | 1/1GN單門平台低溫雪櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 128L             |
| FHC1G2D     | 1375*700*850         | 1/1GN雙門平台高溫雪櫃 | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 280L             |
| FMC1G2D     | 1375*700*850         | 1/1GN雙門平台中溫雪櫃 | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 280L             |
| FLC1G2D     | 1375*700*850         | 1/1GN雙門平台低溫雪櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 280L             |
| FHC1G3D     | 1840*700*850         | 1/1GN三門平台高溫雪櫃 | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 430L             |
| FMC1G3D     | 1840*700*850         | 1/1GN三門平台中溫雪櫃 | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 430L             |
| FLC1G3D     | 1840*700*850         | 1/1GN三門平台低溫雪櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 430L             |

## 1/2 GN款平台雪櫃系列 | 1/2 GN Undercounter Refrigerator Series

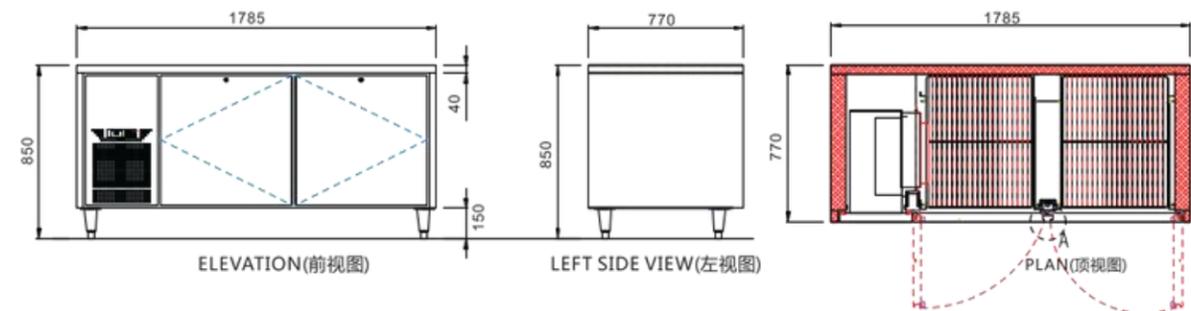

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title    | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|----------------|---------------|-----------------------|---------------|------------|------------------|
| FHC2G1D     | 1115*770*850         | 2/1 GN單門平台高溫雪櫃 | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 232L             |
| FMC2G1D     | 1115*770*850         | 2/1GN單門平台中溫雪櫃  | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 232L             |
| FLC2G1D     | 1115*770*850         | 2/1GN單門平台低溫雪櫃  | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 232L             |
| FHC2G2D     | 1785*770*850         | 2/1GN雙門平台高溫雪櫃  | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 492L             |
| FMC2G2D     | 1785*770*850         | 2/1GN雙門平台中溫雪櫃  | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 492L             |
| FLC2G2D     | 1785*770*850         | 2/1GN雙門平台低溫雪櫃  | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 492L             |

## 平台雪櫃系列 | Undercounter Refrigerator Series

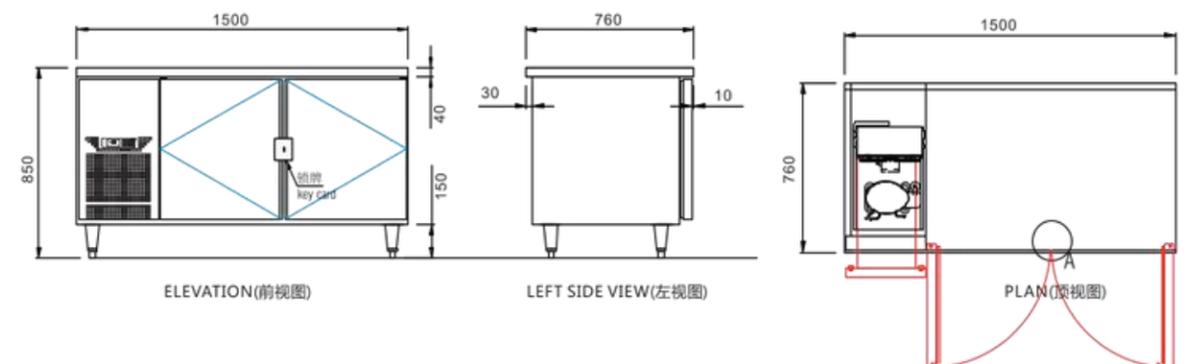

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FH0.1C1DF   | 870*760*850          | 單門平檯高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 145L             |
| FM0.1C1DF   | 870*760*850          | 單門平檯中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 145L             |
| FL0.1C1DF   | 870*760*850          | 單門平檯底溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 145L             |
| FH0.2C2DF   | 1200*760*850         | 雙門平檯高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 263L             |
| FM0.2C2DF   | 1200*760*850         | 雙門平檯中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 263L             |
| FL0.2C2DF   | 1200*760*850         | 雙門平檯底溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 263L             |
| FH0.3C2DF   | 1500*760*850         | 雙門平檯高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 370L             |
| FM0.3C2DF   | 1500*760*850         | 雙門平檯中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 370L             |
| FL0.3C2DF   | 1500*760*850         | 雙門平檯底溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 370L             |
| FH0.4C2DF   | 1800*760*850         | 雙門平檯高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 478L             |
| FM0.4C2DF   | 1800*760*850         | 雙門平檯中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 478L             |
| FL0.4C2DF   | 1800*760*850         | 雙門平檯底溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 478L             |
| FH0.4C3DF   | 1800*760*850         | 三門平檯高溫雪櫃    | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 478L             |
| FM0.4C3DF   | 1800*760*850         | 三門平檯中溫雪櫃    | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 478L             |
| FL0.4C3DF   | 1800*760*850         | 三門平檯底溫雪櫃    | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 478L             |


# 爐台櫃系列 Under Broiler Counters Series

## PRODUCT FEATURES | 產品規格

- 鍍鋅鋼背板及底板
- 304不銹鋼外殼及內膽
- 適用1/1 GN盤
- 自動蒸發冷凝水設計，無需排水
- 數碼溫控器
- 220V/50Hz
- 插拔式冷凝機組，便於清潔及維修
- 304-grade stainless steel exterior and interior
- Compatible with 1/1 GN pans
- Galvanized steel back and base
- Self-evaporating condensation water, drainage not required
- Digital controller
- 220V/50Hz
- Removable cassette-type condensing unit and evaporator for easy cleaning and repairs
- The liner air design is convenient to clean

## ALTERNATIVE | 備選

- 304不銹鋼底板
- 304不銹鋼背板
- 換用塑膠調節腳（代替不銹鋼腳）
- 右側壓縮機
- 遙控冷凝系統
- 220V/60Hz
- 304 stainless steel bottom
- 304 stainless steel back
- Replace with plastic foot instead of steel foot
- Right-hand side compressor
- Remote refrigeration system
- 220V/60Hz

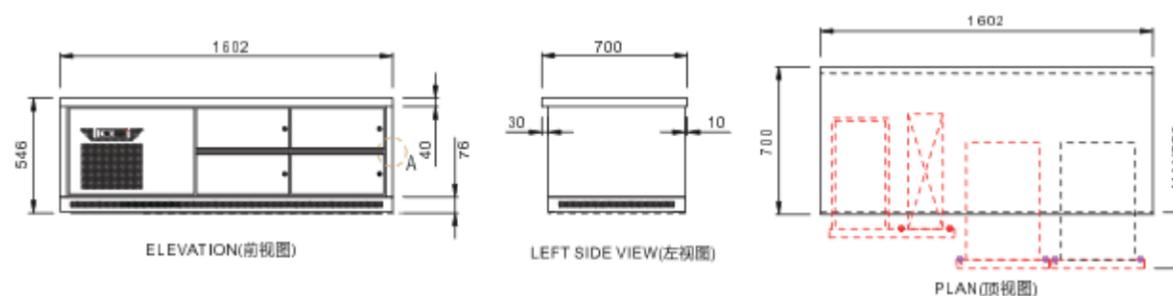

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FHC1G2DN    | 1145*700*546         | 雙抽屜爐台高溫雪櫃   | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 75L              |
| FMC1G2DN    | 1145*700*546         | 雙抽屜爐台中溫雪櫃   | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 75L              |
| FLC1G2DN    | 1145*700*546         | 雙抽屜爐台低溫雪櫃   | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 75L              |
| FHC1G4DN    | 1602*700*546         | 四抽屜爐台高溫雪櫃   | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 180L             |
| FMC1G4DN    | 1602*700*546         | 四抽屜爐台中溫雪櫃   | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 180L             |
| FLC1G4DN    | 1602*700*546         | 四抽屜爐台低溫雪櫃   | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 180L             |
| FHC1G6DN    | 2060*700*546         | 六抽屜爐台高溫雪櫃   | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 250L             |
| FMC1G6DN    | 2060*700*546         | 六抽屜爐台中溫雪櫃   | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 250L             |

# 急速冷藏冷凍櫃系列 Flash Freezing Refrigerator Series




## PRODUCT FEATURES | 產品規格

- 304不銹鋼外殼及內膽
- 鍍鋅鋼底板及背板
- 135mm重型萬向腳輪連剎車功能
- 配備食物探針
- 配備滑軌
- 清晰的LED螢幕可顯示時間和食物儲存溫度
- 急速冷藏：90°C降至+3°C需約90分鐘
- 急速冷凍：90°C降至-18°C需約240分鐘
- 適用1/1 GN盤
- 自動蒸發冷凝水設計，無需排水
- 220V/50Hz
- 內膽圓角設計方便清潔
- 304-grade stainless steel exterior and interior
- Galvanized steel back and base
- On 135mm heavy-duty, non-marking swivel and brake castors
- Fitted with food probe
- Fitted with tray slides
- Clear LED display for time and food probe temperature
- Blast chiller: cools food from +90°C to +3°C in 90 minutes
- Blast freezer: also blasts freeze from +90°C to -18°C in 240 minutes
- Accommodate 1/1 GN size
- Self-evaporating condensation water, drainage not required
- 220V/50Hz
- The liner air design is convenient to clean

## ALTERNATIVE | 備選

- 304不銹鋼底板
- 304不銹鋼背板
- 圓筒門鎖
- 220V/60Hz
- 304 stainless steel bottom
- 304 stainless steel back
- Cylindrical locks fitted for door
- 220V/60Hz

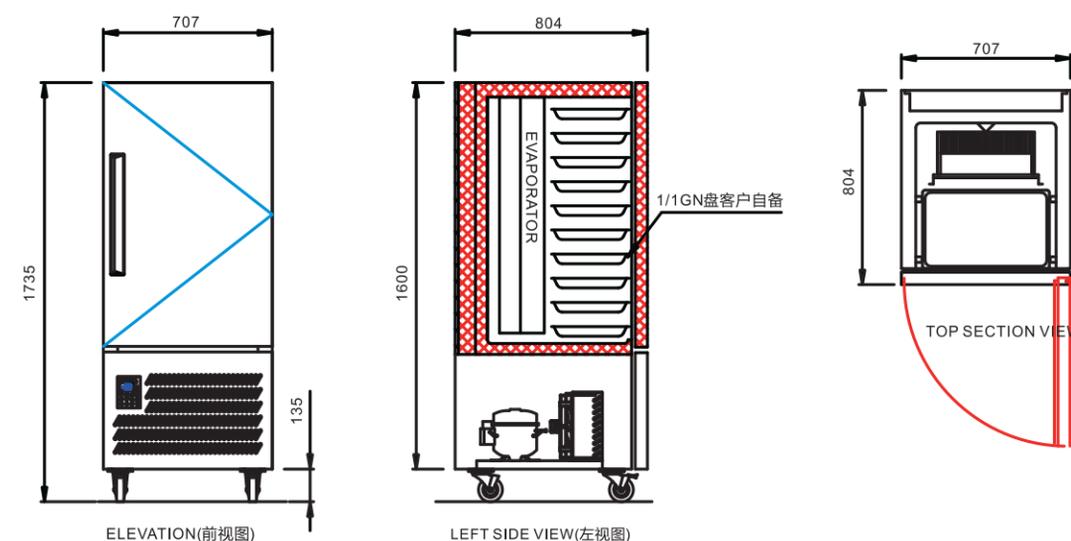

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FBC/F10     | 707*804*885          | 急速冷藏冷凍雪櫃    | 風冷            | +90~+3/-18°C          | 220V/50HZ     | R404a      | 80L              |
| FBC/F20     | 707*804*1290         | 急速冷藏冷凍雪櫃    | 風冷            | +90~+3/-18°C          | 220V/50HZ     | R404a      | 145L             |
| FBC/F30     | 707*804*1735         | 急速冷藏冷凍雪櫃    | 風冷            | +90~+3/-18°C          | 220V/50HZ     | R404a      | 215L             |
| FBC/F40     | 707*804*1905         | 急速冷藏冷凍雪櫃    | 風冷            | +90~+3/-18°C          | 220V/50HZ     | R404a      | 250L             |

# 推入式雪櫃系列 Push Type Refrigerator Series




## PRODUCT FEATURES | 產品規格

- 自動蒸發冷凝水設計，無需排水
- 304不銹鋼外殼及內膽
- 適用1/1 GN盤
- 220V/50Hz
- 數碼溫控器
- 內膽圓角設計方便清潔
- Self-evaporating condensation water, drainage not required
- 304-grade stainless steel exterior and interior
- Compatible with 1/1 GN pans
- 220V/50Hz
- Digital controller
- The liner air design is convenient to clean

## ALTERNATIVE | 備選

- 304不銹鋼背板
- LED照明燈
- 可調節層架
- 可調節層架支架
- 內門板擋條 (L形)
- 導向底板
- 專用推車
- 304不銹鋼底板
- 220V/60Hz
- 304 stainless steel base
- 304 stainless steel back
- LED lighting
- Adjustable shelf
- Adjustable shelf brackets
- L-type inner door stopper
- Floor guide plate
- Dedicated trolley
- 220V/60Hz

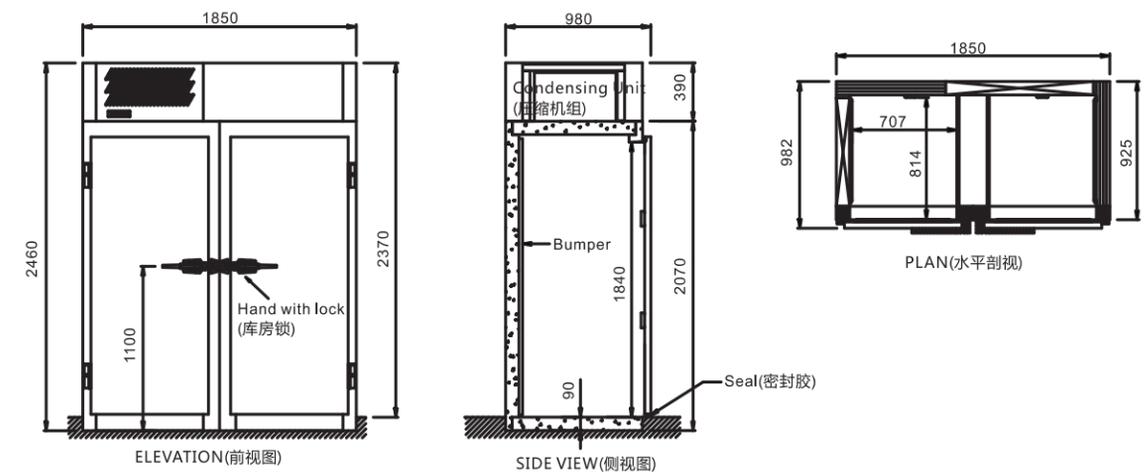

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FHP1D       | 905*980*2460         | 單門推入式高溫雪櫃   | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 1035L            |
| FMP1D       | 905*980*2460         | 單門推入式中溫雪櫃   | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 1035L            |
| FLM1D       | 905*980*2460         | 單門推入式低溫雪櫃   | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 1035L            |
| FHP2D       | 1850*980*2460        | 雙門推入式高溫雪櫃   | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 2450L            |
| FMP2D       | 1850*980*2460        | 雙門推入式中溫雪櫃   | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 2450L            |
| FLM2D       | 1850*980*2460        | 雙門推入式低溫雪櫃   | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 2450L            |
| FHP1DS      | 905*980*2460         | 雙門雙通推入式高溫雪櫃 | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 1090L            |
| FMP1DS      | 905*980*2460         | 雙門雙通推入式中溫雪櫃 | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 1090L            |
| FLM1DS      | 905*980*2460         | 雙門雙通推入式低溫雪櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 1090L            |
| FHP2DS      | 1850*980*2460        | 四門雙通推入式高溫雪櫃 | 風冷            | +1~+4°C               | 220V/50HZ     | R134a      | 2590L            |
| FMP2DS      | 1850*980*2460        | 四門雙通推入式中溫雪櫃 | 風冷            | -2~+2°C               | 220V/50HZ     | R134a      | 2590L            |
| FLM2DS      | 1850*980*2460        | 四門雙通推入式低溫雪櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      | 2590L            |



# 飲品展示櫃系列 Beverage Display Cabinet Series




## PRODUCT FEATURES | 產品規格

- 自動蒸發冷凝水設計，無需排水
- 304不銹鋼內膽配304或430鍍鋅鋼外殼
- 鍍鋅鋼底板及背板
- 強化玻璃門
- 鎖匙門鎖
- 配層架（可調高度）
- 門框配發泡玻璃門
- 配備燈箱
- 220V/50Hz
- Self-evaporating condensation water, drainage not required
- 304-grade stainless steel interior and 304 or 430 galvanized steel exterior
- Galvanized steel back and base
- Tempered glass doors
- Cylindrical locks (for fitted use)
- Fitted with movable shelving
- Filled with thick foamed glass swing doors
- Fitted with fluorescent lightbox
- 220V/50Hz
- The liner air design is convenient to clean



## ALTERNATIVE | 備選

- 304不銹鋼背板
- 304不銹鋼底板
- 黑色鍍鋅鋼外殼
- 雙門設計
- 單門設計
- 滑動門
- 廣告燈箱（可選）
- LED顯示飲品櫃（高亮燈箱）
- 220V/60Hz
- 304 stainless steel back
- 304 stainless steel base
- Black galvanized steel exterior
- Double-door model
- Single-door model
- Sliding door
- Optional lightbox
- Choose to apply LED beverage display coolers (high brightness with lightbox)
- 220V/60Hz

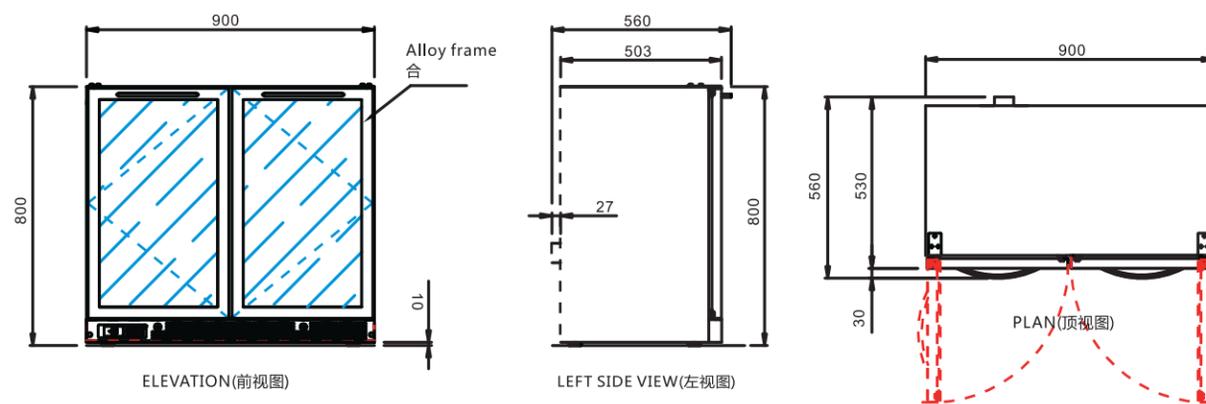

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FBC1GD      | 600*560*800          | 單門飲料展示櫃     | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      | 115L             |
| FBC2GD      | 900*560*800          | 雙門飲料展示櫃     | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      | 170L             |
| FBC3GD      | 1350*560*800         | 三門飲料展示櫃     | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      | 268L             |
| FBR1GD      | 600*560*900          | 帶檯面單門飲料展示櫃  | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      | 120L             |
| FBR2GD      | 900*560*900          | 帶檯面雙門飲料展示櫃  | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      | 180L             |
| FBR3GD      | 1350*560*900         | 帶檯面三門飲料展示櫃  | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      | 278L             |

# 紅酒展示櫃系列 Wine Display Cabinet Series

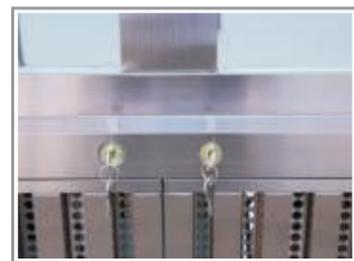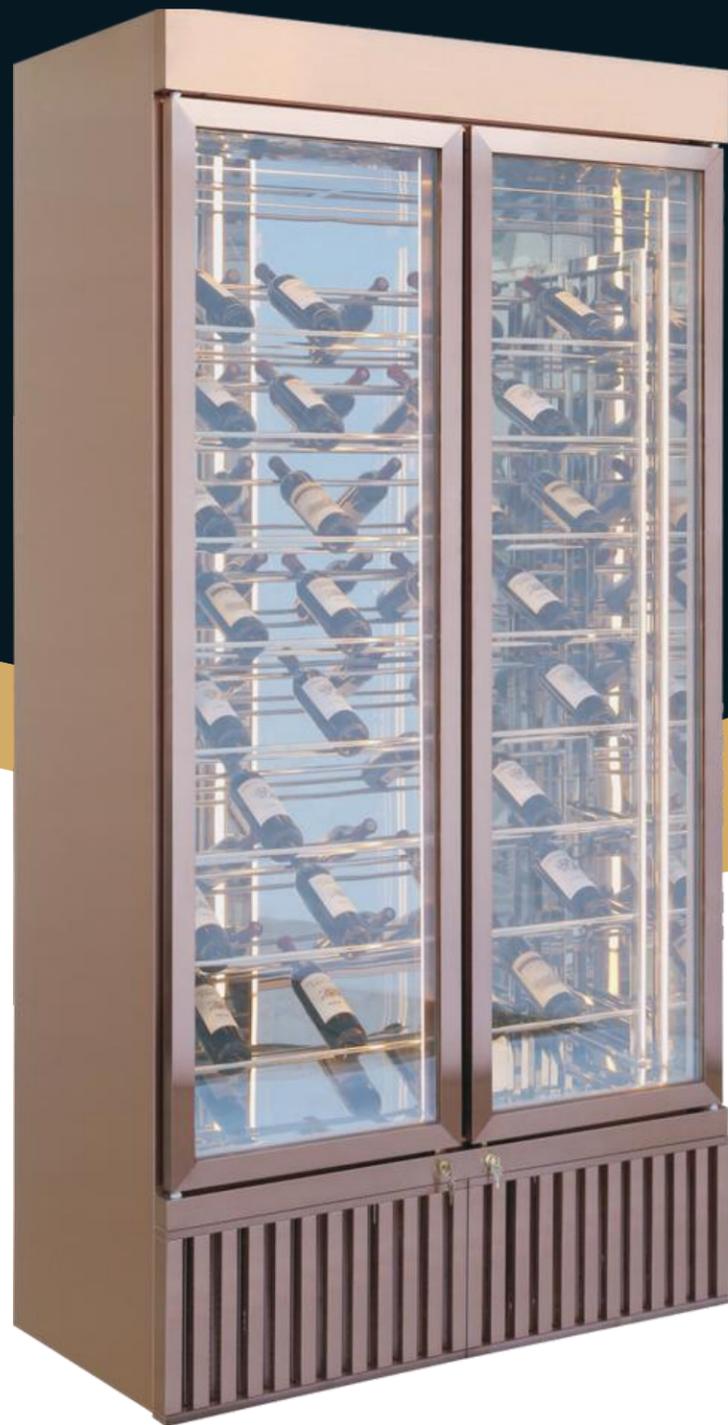


## PRODUCT FEATURES | 產品規格

- 內建LED燈照明
- 採用可插拔式冷凝機組
- 獨立循環冷卻風扇系統，提供穩定溫度和抗結霜性能
- 觸控式溫控屏幕
- 自動蒸發冷凝水設計，無需排水
- 多抽屜式底座集水盤
- 配備活動門鎖
- 7層層架（可調位置）
- 可根據需求選配多種角度酒架（橫放／傾斜）
- Built-in LED lighting
- Removable type evaporator section
- Circulating cooler for steady operation and anti-frost performance
- Digital controller with display screen
- Self-evaporating condensation water, no drainage required
- Multi-condensation door drawer base trays
- Fitted with door locks
- 7 shelves (adjustable shelf position)
- Different-angle design stainless steel wine rack (different

## ALTERNATIVE | 備選

- 插拔式或一體式冷凝機組
- 圓筒門鎖、磁力鎖或密碼鎖
- 雙門或單門款式
- 鍍銅不鏽鋼外殼（標準）或黑色拉絲不鏽鋼
- 鋁合金邊框
- 門體選項：單層／雙層／三層強化玻璃
- 門框：銅色、黑色、銀色
- 可選高亮LED燈條
- 遙控冷凝系統
- 220V/60Hz
- Available in removable or self-contained condensing unit
- Cylindrical lock, magnetic lock or digital combination lock for door
- Double or single door models
- Default finish: rose gold stainless steel or black brushed stainless steel
- Choice of aluminum alloy frame
- Choice of 1-, 2-, or 3-layered glass
- Frame color options: rose gold / black / silver
- Optional high-brightness LED light strips
- Remote system for refrigeration
- 220V/60Hz

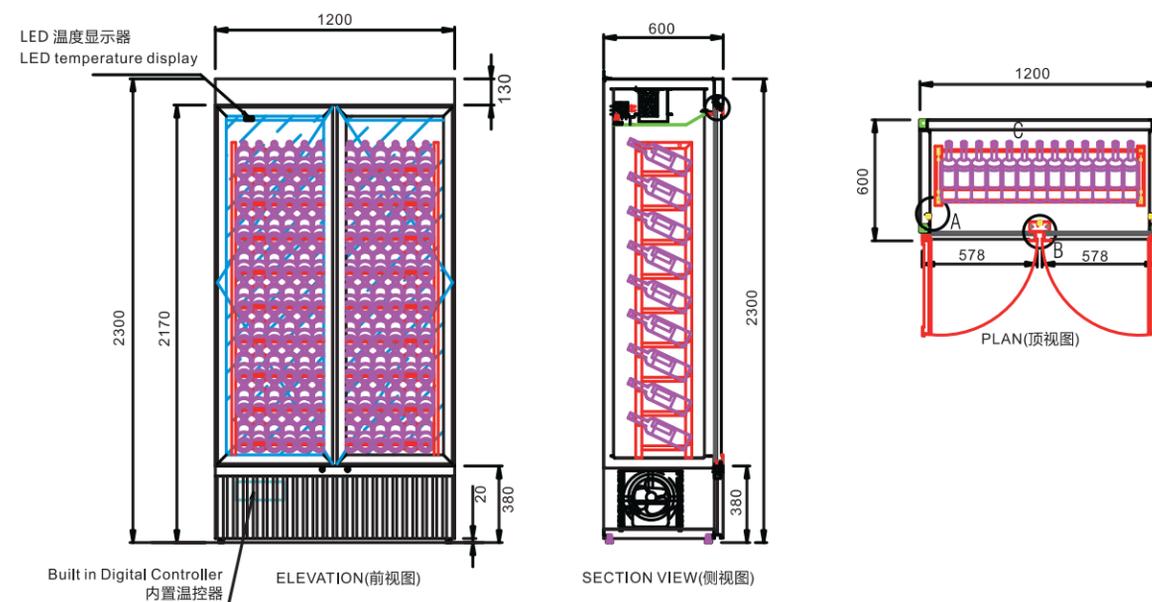

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. | 容量 (L)<br>Volume |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|------------------|
| FWE1GD      | 600*600*2300         | 單門紅酒展示櫃     | 風冷            | +12~+18°C             | 220V/50HZ     | R134a      | 45 Bottles       |
| FWE2GD      | 1200*600*2300        | 雙門紅酒展示櫃     | 風冷            | +12~+18°C             | 220V/50HZ     | R134a      | 117 Bottles      |
| FWE3GD      | 1800*600*2300        | 三門紅酒展示櫃     | 風冷            | +12~+18°C             | 220V/50HZ     | R134a      | 171 Bottles      |

# 雪糕展示櫃系列 Ice Cream Display Cabinet Series




## PRODUCT FEATURES | 產品規格

- 小弧邊雙層超白鋼化玻璃除霧玻
- 溫暖白光LED燈條
- 玻璃採斜角包邊設計
- 嵌入式沖孔型護風罩
- 操作側配不銹鋼框玻璃推拉門
- 獨特導風氣流設計
- 數碼溫控器，清晰顯示，操作簡單，性能穩定
- 自動除霜
- 除霜水蒸發器，無需接排水喉
- 高效節能風冷系統
- 220V/50Hz
- Beautifully-looking double-layer super-white tempered defogging glass
- Warm white LED strip lighting
- 45-degree angled edges for top and front glass
- Built-in type white die-punched louver
- Glass sliding doors with stainless steel frame on the operator's side
- Unique design for air movement
- Digital controller for easy operation and fail-safe performance, featuring clear digital display
- Automatic defrost
- Defrost water vaporiser, drain connection not required
- Efficient forced air cooling system
- 220V/50Hz

## ALTERNATIVE | 備選

- 雙層玻璃配加熱膜
- 不同顏色/材質可選
- 所有可視面採V型倒角設計
- 推門可選雙層玻璃+加熱膜
- 220V/60Hz
- Double-layer toughened glass with heated film
- Different colors and finishes
- V-cut for all visible bends
- Optional double-layer glasses with heated film sliding door
- 220V/60Hz

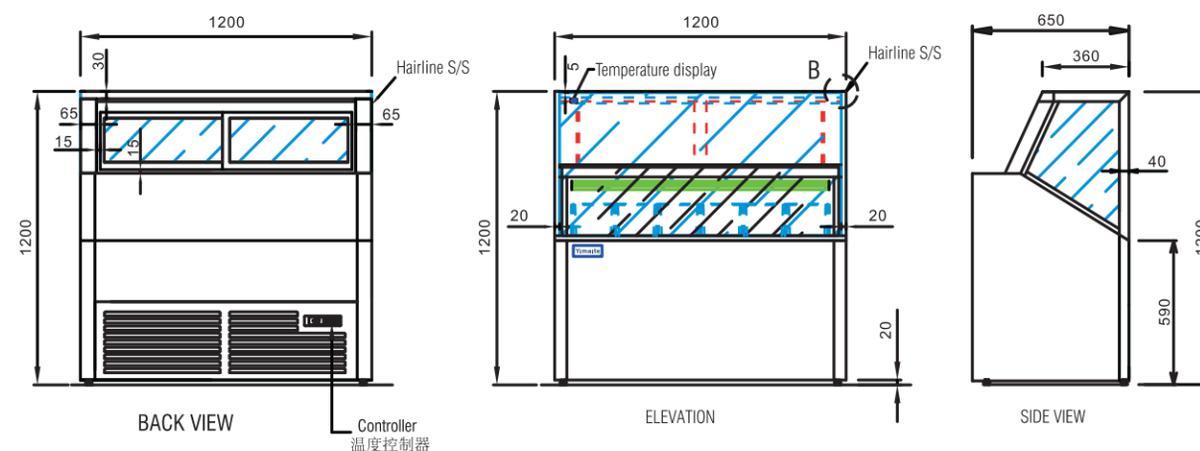

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|
| FLK0.9GD    | 900*650*1200         | 900mm雪糕展示櫃  | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      |
| FLK1.2GD    | 1200*650*1200        | 1200mm雪糕展示櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      |
| FLK1.5GD    | 1500*650*1200        | 1500mm雪糕展示櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      |
| FLK1.8GD    | 1800*650*1200        | 1800mm雪糕展示櫃 | 風冷            | -22~-18°C             | 220V/50HZ     | R404a      |

# 蛋糕展示櫃系列 Cake Display Cabinet Series




## PRODUCT FEATURES | 產品規格

- 現代感雙層超白鋼化除霧玻璃
- 採用斜邊45°包邊設計
- 溫暖白光 LED 燈條
- 操作側配不銹鋼框玻璃滑門
- 出風口導風設計，有效防止食物風乾
- 高密度發泡保溫層，精密注塑成型
- 數碼溫控器，清晰顯示，操作簡便，性能穩定
- 自動除霜功能
- 除霜水蒸發器，無需接駁排水喉
- 高效風冷循環系統
- 自動蒸發冷凝水設計，無需排水
- 220V/50Hz
- Modern double-layer super-white tempered defogging glass
- 45-degree angled edges for top and front glass
- Warm white LED strip lighting
- Glass sliding doors with stainless steel frame on the operator's side
- Export design for air movement to prevent food drying
- Precision injection, high density polyurethane insulation
- Digital controller for easy operation and fail-safe performance, featuring clear digital display
- Automatic defrost
- Defrost water vaporiser, drain connection not required
- Efficient forced air cooling system
- Self-evaporating condensation water, drainage not required
- 220V/50Hz


## ALTERNATIVE | 備選

- 經典珠寶櫃外觀設計
- V-Cut 可視位置倒角
- V-Cut 出風口
- 雙層玻璃加熱滑門可選
- 不同顏色和材質可選
- 220V/60Hz
- Classic jewelry design
- V-cut for all visible bends
- V-cut louver
- Optional double layer glasses with heated film sliding doors
- Different colors and finishes
- 220V/60Hz

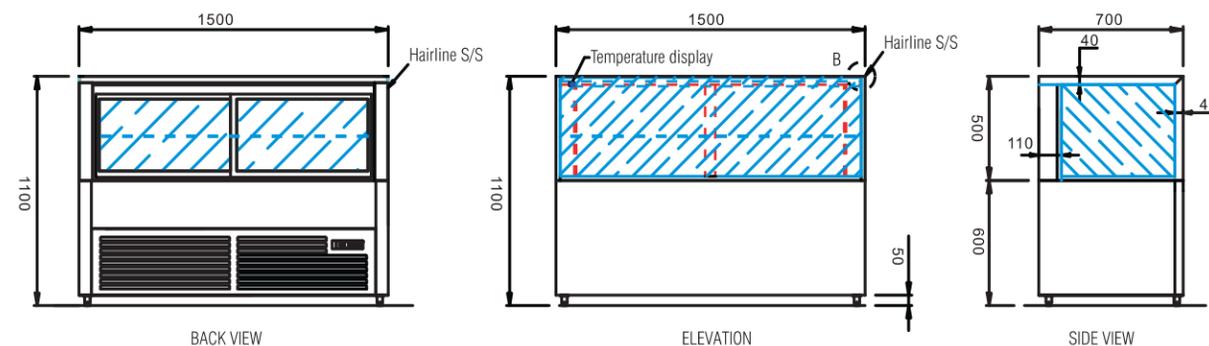

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|
| FCK0.9GD    | 900*700*1100         | 900mm蛋糕展示櫃  | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |
| FCK1.2GD    | 1200*700*1100        | 1200mm蛋糕展示櫃 | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |
| FCK1.5GD    | 1500*700*1100        | 1500mm蛋糕展示櫃 | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |
| FCK1.8GD    | 1800*700*1100        | 1800mm蛋糕展示櫃 | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |

# 壽司展示櫃系列 Sushi Display Cabinet Series


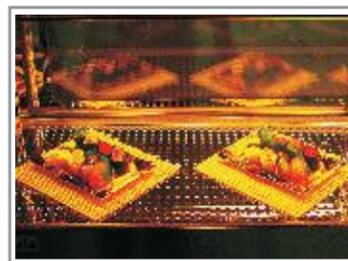


## PRODUCT FEATURES | 產品規格

- 現代方形外觀雙層超白鋼化玻璃加熱展示櫃
- 操作側配不銹鋼框玻璃推拉門
- 雙層超白鋼化除霧玻璃
- 採用45度斜邊設計
- 溫暖白光 LED 燈條
- 所有可視邊皆為 V-Cut 倒角
- 靜態冷卻系統，防止食物變乾
- 支援最長8米喉管接駁的遙控冷凝系統
- 需接駁排水喉
- 數碼溫控器，操作簡單，性能穩定，配清晰顯示
- 220V/50Hz
- Contemporary rectangular shaped double-layer ultra-clear glass case with heating film showcase
- Glass sliding doors with stainless steel frame on the operator's side
- Double-layer super white toughened defogging glass
- 45-degree angled
- Warm white LED strip lighting
- All visible bends are V-cut
- Static cooling refrigeration system prevents drying out of the products
- Remote refrigeration system with maximum 8 meters pipe length connection
- Drain connection is required
- Digital controller for easy operation and fail-safe performance, featuring clear digital display
- 220V/50Hz

## ALTERNATIVE | 備選

- 雙層一體鋼化玻璃
- 門體可選雙層玻璃加熱滑門
- 不同顏色與材質可選
- 220V/60Hz
- Double-layer toughened glass
- Optional double-layer glasses with heated film sliding doors
- Different colors and finishes
- 220V/60Hz

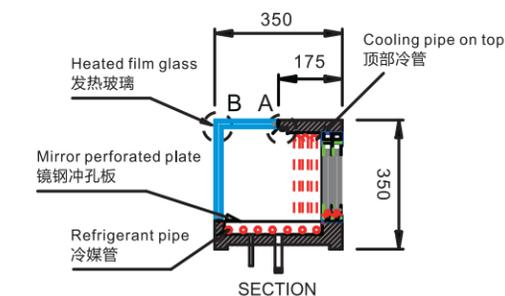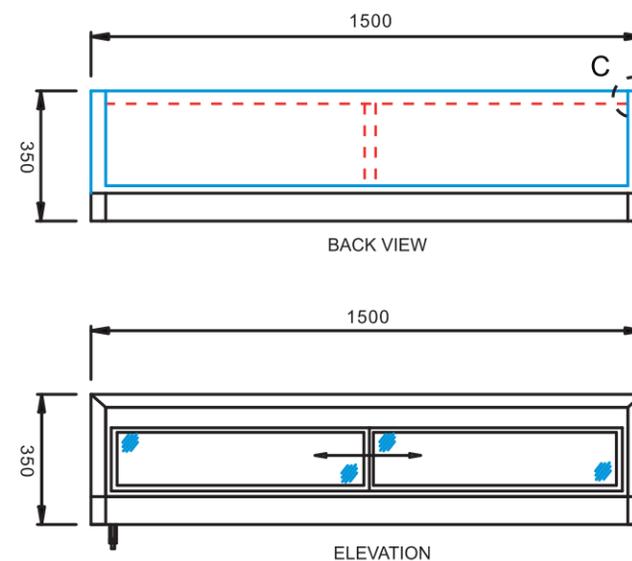

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|
| FSC1.2GD    | 1200*350*350         | 1200mm壽司展示櫃 | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |
| FSC1.5GD    | 1500*350*350         | 1500mm壽司展示櫃 | 風冷            | +2~+8°C               | 220V/50Z      | R134a      |
| FSC1.8GD    | 1800*350*350         | 1800mm壽司展示櫃 | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |

# 風幕展示櫃系列 Wind Curtain Display Cabinet Series




## PRODUCT FEATURES | 產品規格

- 採用優質不銹鋼，高品質保溫材料，符合節能環保要求
- 溫控穩定性高，各層溫度均勻，覆蓋每個角落，制冷速度快
- 採用原裝進口壓縮機，故障率低，冷卻系統設計優良
- 應用導風設計
- 能延長食物的保鮮狀態，達到新鮮存儲與完美保鮮的效果
- 廣泛應用於超市、蛋糕店、奶茶店、五星級酒店自助餐廳等場所
- 220V/50Hz
- Adopt high quality stainless steel, high quality thermal insulation materials, in line with energy conservation and environmental protection requirements
- Temperature stability, each layer of temperature is uniform, covering every corner, fast cooling
- Selection of original imported compressors with low failure rate
- Use of air-guiding design
- Can keep food fresh, extend shelf life, and achieve a balanced and perfect preservation effect
- Widely used in supermarkets, cake shops, milk tea shops, five-star hotel cafeterias
- 220V/50Hz

## ALTERNATIVE | 備選

- 層板傾角可選
- 門體可選配
- 側板可選玻璃或發泡箱體
- 材質及顏色皆可按需選擇
- 220V/60Hz
- Layers tilt angle optional
- Door or curtain available
- Side glass or foaming box body optional
- Material and material colors available
- 220V/60Hz

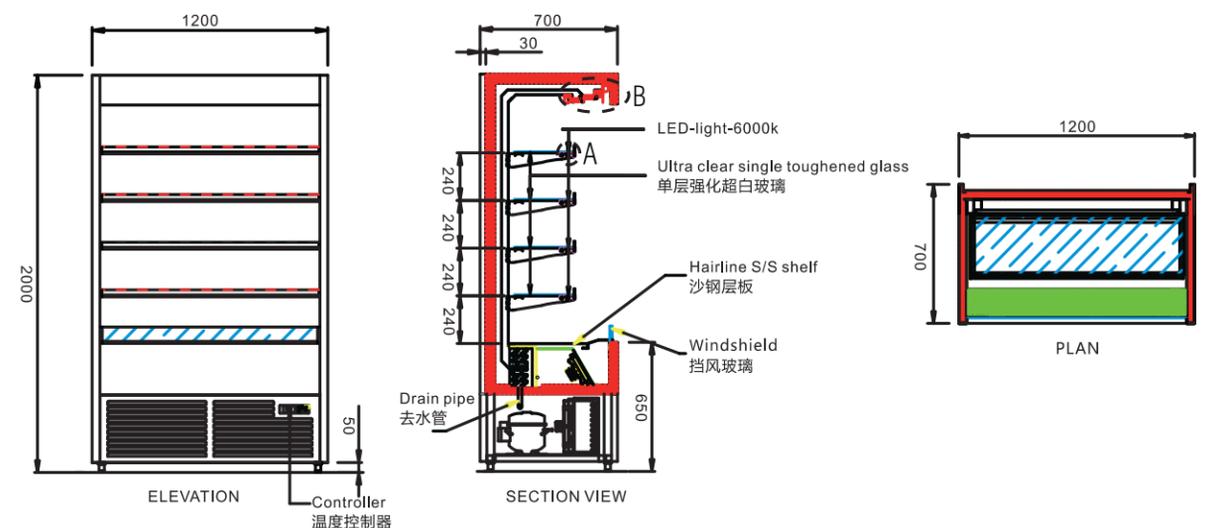

| 型號<br>Model | 尺寸<br>Dimension (mm) | 名稱<br>Title | 製冷<br>Cooling | 溫度範圍<br>Temp Range °C | 電壓<br>Voltage | 雪種<br>Ref. |
|-------------|----------------------|-------------|---------------|-----------------------|---------------|------------|
| FFM0.9GD    | 900*700*2000         | 900mm風幕展示櫃  | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |
| FFM1.2GD    | 1200*700*2000        | 1200mm風幕展示櫃 | 風冷            | +2~+8°C               | 220V/50Z      | R134a      |
| FFM1.5GD    | 1500*700*2000        | 1500mm風幕展示櫃 | 風冷            | +2~+8°C               | 220V/50HZ     | R134a      |